


HVAC PRODUCT APPLICATIONS

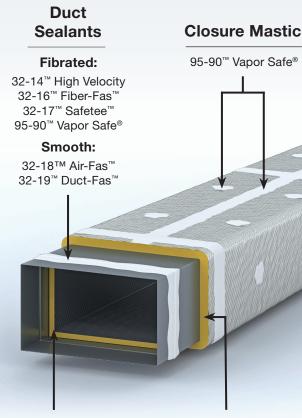

Duct Liner and Duct Wrap Adhesives

Water-Based: 85-00[™] Line-Fas[™] 85-60[™] Quick-Tack[™]

81-10[™] S.M. Adhesive 82-00[™] Duct Liner 85-62[™] Jac-Tac[™] 85-22[™] Duct-Fas[™] 85-65[™] Stic-Fas[™] 85-45 Fos-Stick™

Solvent-Based:

For more detailed information about Foster® products, visit fosterproducts.com.



H.B. Fuller Construction Products Inc. 1105 South Frontenac Street Aurora, IL 60504-6451 Phone: (800) 832-9002

fosterproducts.com



Foster's

HVAC PRODUCTS

Our History

For more than 100 years, engineers, owners and contractors have depended on the quality and reliability of Foster[®] products. Since 1909, Foster[®] has earned a well-deserved reputation as a developer and supplier of high-quality adhesives, sealants and coatings for the industrial and commercial construction industries.

Foster[®] has a comprehensive accessory product line to serve the needs of the HVAC industry. From duct sealants to adhesives to closure mastics, we make the products that contractors and owners depend on to ensure a long-lasting, high-quality installation.

Form# FLHVAC N0714-16

Adhesives

ster 85-60 =--

Water-based formula

Water-based formula

Aerosol

Foster

Fos-Stik Clear Adhosive Sp HAPS FREE 85-45

Foster[®] 85-60[™] Quick-Tack[™] Adhesive (Tan)

- Use to adhere low density duct liner, duct wrap and fibrous glass insulation to the interior and exterior of HVAC ducts
- · High tack, rapid-setting adhesive
- Meets ASTM C916 Type II (ASC-A-7001A, Type II) requirements

Adhesive (Dries Clear)

· Runs smoothly on spray head,

and 90B 25/50 requirements

roll coater or drip line equipment

UL classified and meets NFPA-90A

to galvanized steel

· UL classified and meets NFPA-90A and 90B 25/50 requirements

Foster[®] 85-00[™] Line-Fas[™]

· Designed for adhering fiber glass and

• High volume spray and coil line operations

mineral wool duct liner insulation



Stic-Fas[™] Adhesive (Grav) § 85-62 mm Adheres low density fibrous duct liner. duct wrap and acoustical linings in air handling systems Use for coil lines and conventional hand spray applications

- Resin and polymer adhesive for fast, wet grab
 - Meets NFPA-90A & 90B 25/50 requirements

Foster[®] 85-62[™] Jac-Tac[™]

Adhesive (Black) & 85-65[™]


Foster[®] 81-10[™] S.M. Adhesive (Green Color)

- · Use for adhering duct liner and duct wrap to the inside or outside of HVAC duct work
- Solvent-based, fast tacking and fast drying adhesive
- UL classified and meets NFPA-90A and 90B 25/50 requirements









high-humidity applications UL-181 B-M listed and classified

Foster[®] 95-90[™] Vapor Safe[®]

Fibrated, duct closure mastic and sealant

sealing foil faced fiberglass duct board,

· Premium grade, all-purpose sealant for

Ideal for vapor sealing ASJ, FRK, and

flex duct and HVAC metal ducts

FSK board facings at joints, laps

and weld pin punctures

Duct Closure Mastic

Foster[®] 32-16[™] Fiber-Fas[™] **Duct Sealant** (Grav)

- · Economical, fibrated, multi-purpose sealant for use on all pressure classes up to 10" w.g.
- Can be used to seal ASJ, FRK and FSK jackets and board facings at joints and laps
- UL 181B-M listed and classified

Smooth

32-19

Water-based formula

ter 32-18

Foster[®] 32-19[™] Duct-Fas[™] **Duct Sealant** (Grav)

- Non-fibrated duct sealant designed for indoor and outdoor use
- Flexible, durable seals on all pressure class ducts and flexible air ducts to rigid connectors
- · Smooth consistency allows easy application by brush, glove, trowel, power extrusion or caulking gun
- UL-181 B-M listed and classified

Foster[®] 32-18[™] Air-Fas[™] **Duct Sealant** (Gray)

- · Economical, water-based, non-fibrated sealant
- Smooth consistency for easy application by brush
- Forms a flexible, yet durable seal against air leakage on all pressure class ducts
- Water-based formula UL-181B-M listed and classified


Solvent-Based, Fibrated



- Foster[®] 32-14[™] **High Velocity Duct Sealant** (Gray) Solvent-based, fibrated sealant sets up quickly
- Strong, elastomeric, compound for indoor applications
- Multi-purpose product for sealing all pressure class HVAC ducts and adhering duct fabrics and flexible tubing runouts to HVAC components

For more information visit fosterproducts.com, call 1-800-832-9002 or contact your Foster® sales representative.





- Rapid tacking, web spray aerosol adhesive
- · Meets California air resources board standard and green seal standards




Pumpable Cold Seal

Foster[®] 10-42[™] Pumpable

Cold Sealer (Cream)

- Designed for use with sheet metal fabrication machines that form locking joints
- · A non-skinning, non-setting, high solids sealant for metal to metal HVAC seam and ioints
- · Fiber and grit free formulation will not clog pumps, hoses or nozzles in extrusion equipment









Water-based formula

er) 32-16 🚊

Water-based formula




- · Low water vapor permeance and good water resistance for

Foster[®] 32-17[™] Safetee[™] **Duct Sealant** (Gray) · Fibrated formula provides a tough, flexible

Duct Sealants

(Off-White)











Water-based formula

Fibrated

Foster 95-90



Water-based formula

