




HVAC Selection Guide



H.B. Fuller

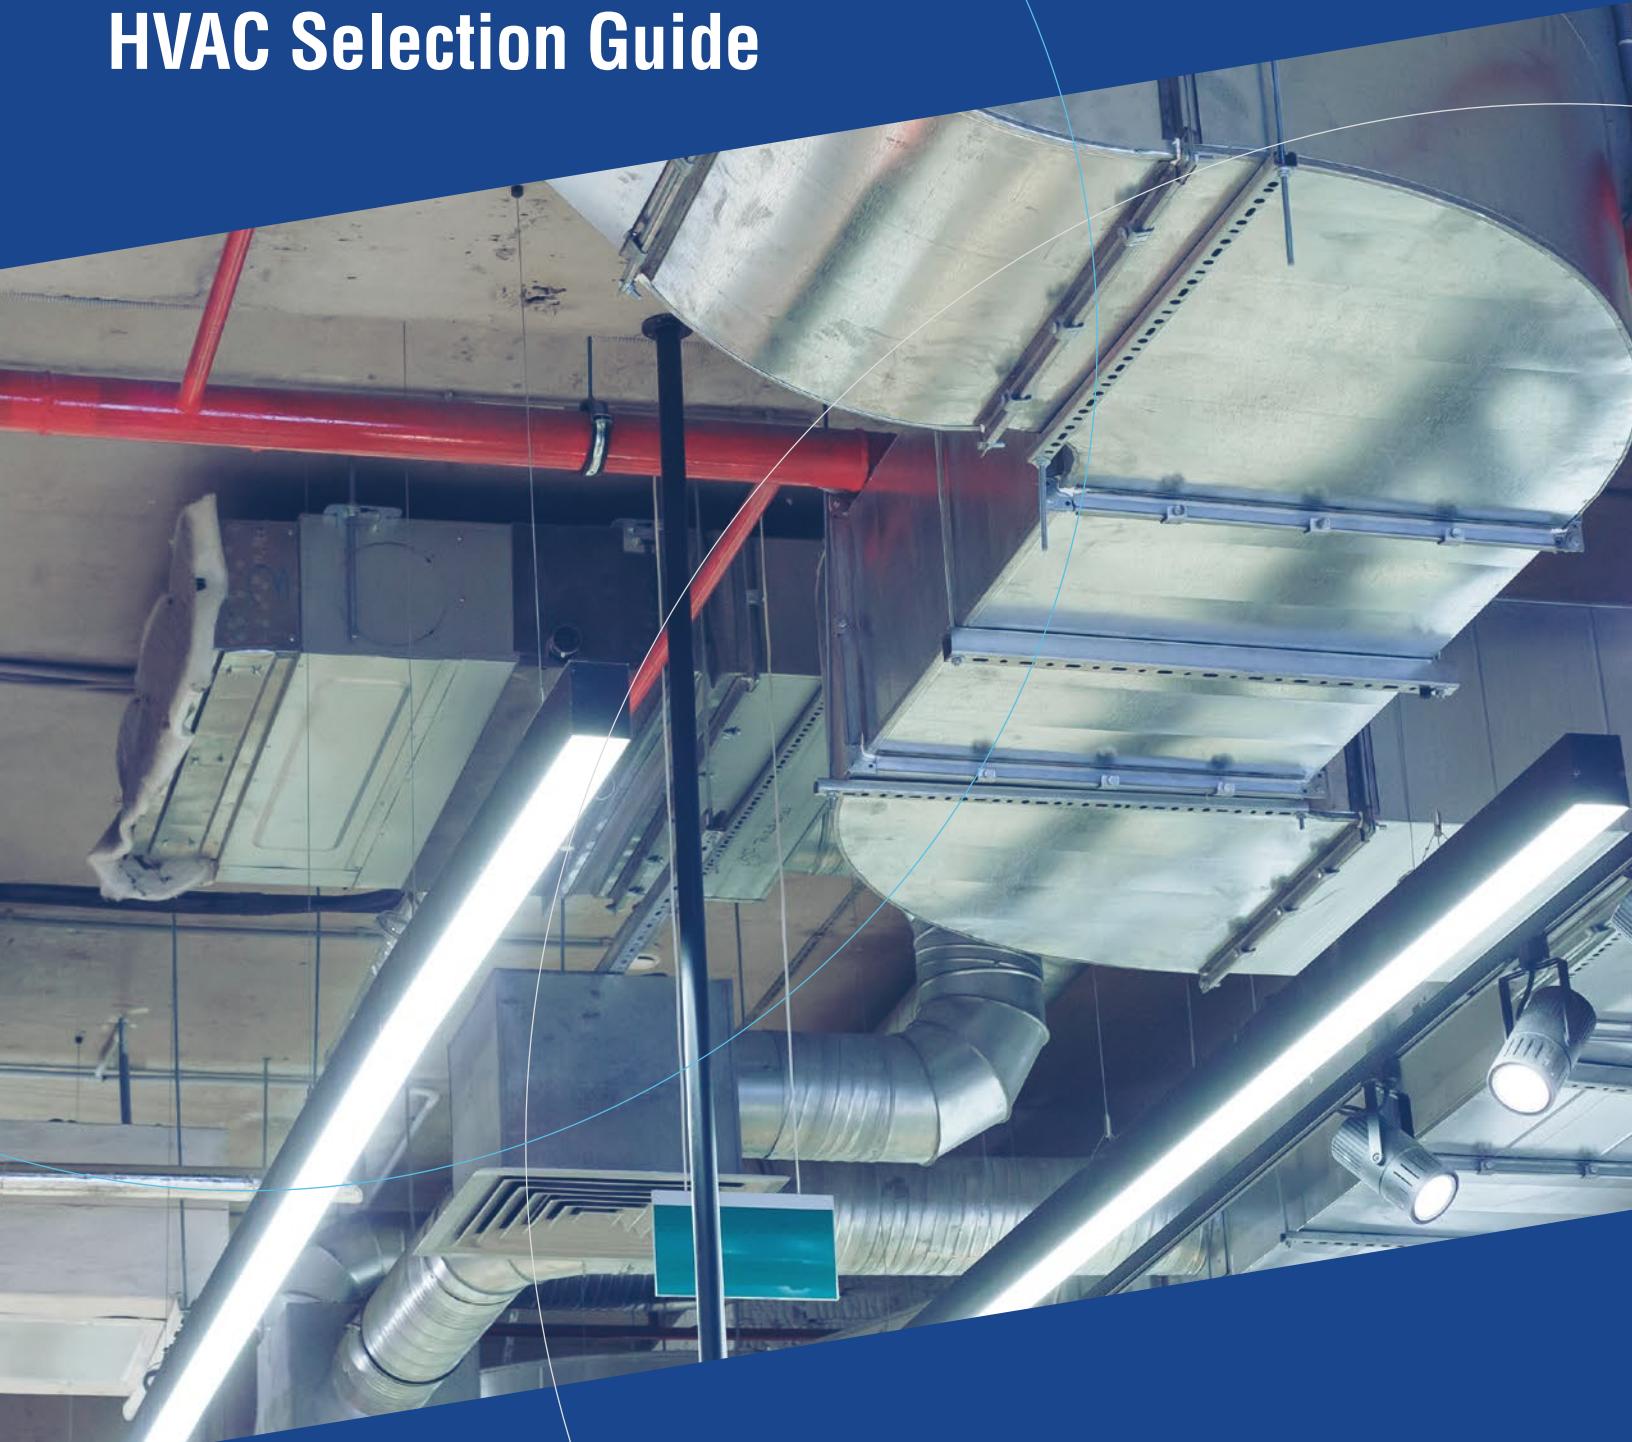

our history

For more than 100 years, engineers, owners and contractors have depended on the quality and reliability of Foster® products. Since 1909, Foster® has earned a well-deserved reputation as a developer and supplier of high-quality adhesives, sealants and coatings for the industrial and commercial construction industries.

Foster® has a comprehensive accessory product line to serve the needs of the HVAC industry. From duct sealants to adhesives to closure mastics, we make the products that contractors and owners depend on to ensure a long-lasting, high-quality installation.

Contact your Foster® Sales Representative
fosterproducts.com/contact

1 DUCT SEALANTS

SMOOTH:

32-18 Air-Fas™

32-19 Duct-Fas™

FIBRATED:

32-13 Low VOC

32-14 High Velocity


32-16 Fiber-Fas™

32-17 Safetee™

FDS-181 Air-Tight™

2 CLOSURE MASTIC

FDS-181 Air-Tight™

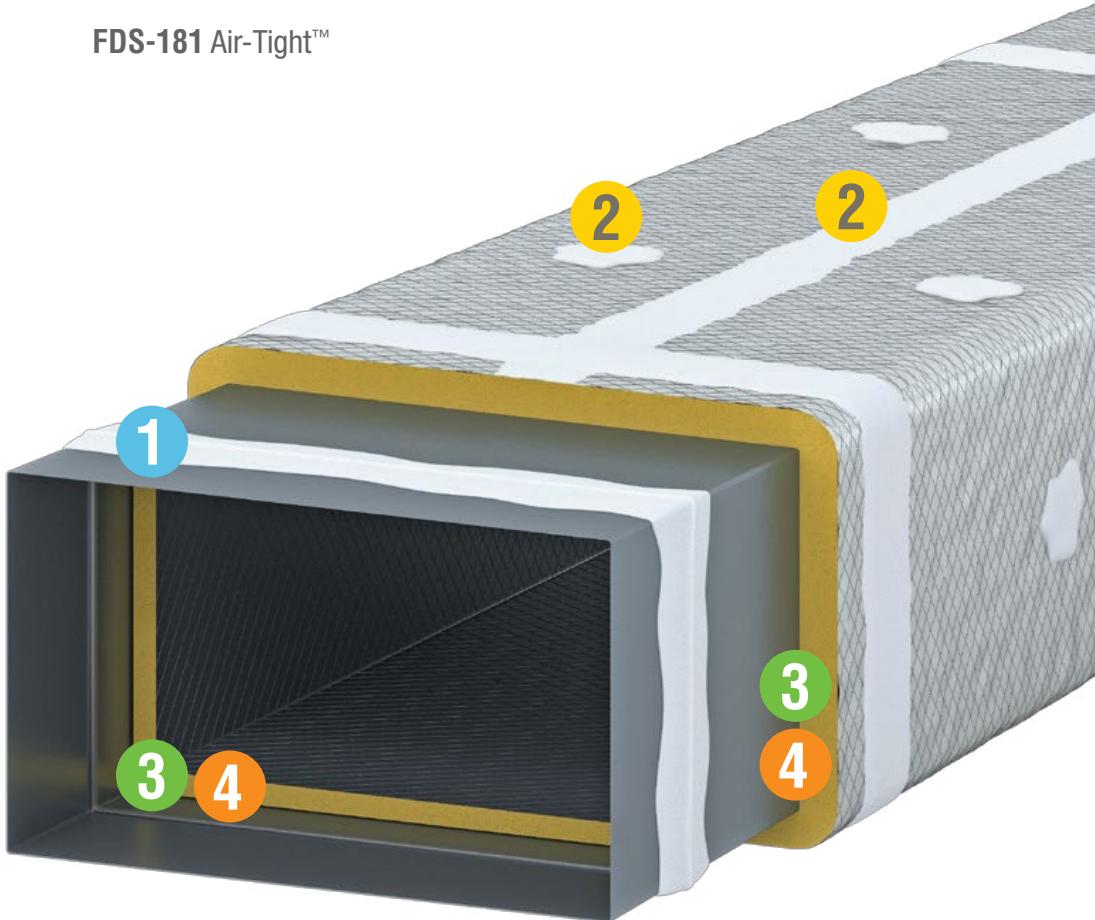

Duct Liner & Duct Wrap Adhesives

3 WATER-BASED

85-10 Duct Liner Adhesive

85-60 Quick-Tack™

85-62 Jac-Tac™

85-65 Stic-Fas™

4 SOLVENT-BASED

81-10 S.M. Adhesive

85-22 Duct-Fas™

85-40 Fos-Stik™ Canister

85-45 Fos-Stik™ Aerosol

85-25LV Drion™ Low VOC Contact Cement

85-26 Drion™ Contact Cement

HVAC

Adhesives



**WATER-BASED
85-10**

DUCT LINER ADHESIVE

- Water-based adhesive for duct liner to metal
- Economical Coil Line Adhesive
- Meets ASTM C916 Type II

COLOR: White & Black
METHOD: Coil Line, Spray Head, Drip Line, Roll Coater





**WATER-BASED
85-60**

QUICK-TACK™ ADHESIVE

- Water-based adhesive for duct liner to metal
- Meets ASTM C916 Type II
- Aggressive Wet Tack
- Best for non-coil line uses by brush or spray
- UL Classified

COLOR: Tan
METHOD: Spray, Brush, Roller






**WATER-BASED
85-62**

JAC-TAC™ ADHESIVE

- Water-based adhesive for duct liner to metal
- Meets ASTM C916 Type II

COLOR: Black
METHOD: Coil Line, Spray, Brush, Roller





**WATER-BASED
85-65**

STIC-FAST™ ADHESIVE

- Water-based adhesive for duct liner to metal
- Meets ASTM C916 Type II

COLOR: Gray
METHOD: Coil Line, Spray, Brush, Roller





**SOLVENT-BASED
81-10**

S.M. ADHESIVE

- Solvent-based adhesive for duct liner to metal
- Meets ASTM C916 Type IV and UL Classified

COLOR: Green
METHOD: Spray, Brush, Roller





**SOLVENT-BASED
82-55**

INSULATION HANGER / STICK PIN ADHESIVE

- Solvent-based adhesive for insulation stick pins to various substrates

COLOR: White
METHOD: Trowel, Putty Knife



SOLVENT-BASED **85-40**

FOS-STIK™ CANISTER ADHESIVE

- Solvent-based general use adhesive
- Contact adhesive for flexible and elastomeric foam insulation

COLOR: Clear

METHOD: Canister adhesive
- web spray



SOLVENT-BASED **85-45**

FOS-STIK™ AEROSOL ADHESIVE

- Solvent-based general use adhesive
- Meets VOC requirements for web spray aerosol adhesive
(not for California - CARB)

COLOR: Dries Clear

METHOD: Aerosol adhesive
- web spray



SOLVENT-BASED **85-25LV**

DRION™ LOW VOC CONTACT CEMENT

- Solvent-based contact adhesive for flexible and elastomeric foam insulation

COLOR: Amber

METHOD: Brush, Roller, Spray



SOLVENT-BASED **85-26**

DRION™ CONTACT CEMENT

- Solvent-based contact adhesive for flexible and elastomeric foam insulation
- Used for forming and bonding joints of pre-insulated phenolic and PIR HVAC ducts

COLOR: Yellow

METHOD: Brush, Roller



HOT MELT **83-13** **HMZP**

HOT MELT ADHESIVE

- PSA adhesive for shop fabrication of insulation to metal
- Facing and jacketing adhesive for pipe covering insulation fabrication
- 100% solids

COLOR: Translucent Amber

METHOD: Swirl Spray, Extrusion

Duct Sealants



SOLVENT-BASED

10-42

PUMPABLE COLD SEALER

- Use for sheet metal locking joints
- Non-skinning, permanently flexible seal on contact

COLOR: White

METHOD: Fabrication Joint Sealer



WATER-BASED FIBRATED

FDS-181



AIR-TIGHT™ DUCT SEALANT

- Water-based fibrated duct sealant and closure mastic
- Indoor / Outdoor Use
- UL 181A-M and UL 181B-M Listed

COLOR: White, Gray, Black

METHOD: Brush



SOLVENT-BASED FIBRATED

32-13

LOW VOC HIGH VELOCITY DUCT SEALANT

- Solvent-based fibrated duct sealant for indoor or outdoor use
- Low VOC

COLOR: Gray

METHOD: Brush, Cartridge



SOLVENT-BASED FIBRATED

32-14



HIGH VELOCITY DUCT SEALANT

- Solvent-based fibrated duct sealant for indoor use
- UL Classified to UL 723

COLOR: Gray

METHOD: Brush



WATER-BASED FIBRATED

32-16



FIBER-FAST™ DUCT SEALANT

- Water-based fibrated duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray

METHOD: Brush



WATER-BASED FIBRATED

32-17



SAFETEE™ DUCT SEALANT

- Water-based fibrated duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray

METHOD: Brush, Cartridge

WATER-BASED SMOOTH

32-18

AIR-FAS™ DUCT SEALANT

- Water-based smooth duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray
METHOD: Brush

WATER-BASED SMOOTH

32-19

DUCT-FAS™ DUCT SEALANT

- Water-based smooth duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray
METHOD: Brush, Cartridge

SILICONE

95-22

SIL-SEAL™ SILICONE SEALANT

- Neutral cure, RTV 100% silicone sealant for indoor and outdoor use
- Low VOC

COLOR: Translucent
METHOD: Cartridge

Tapes

ROLLED MASTIC SEALANT TAPE

10-17

AIR-TIGHT™ FOIL MASTIC SEALANT TAPE

- Butyl-based, pressure sensitive mastic duct sealant tape for indoor or outdoor use
- Aluminum Foil Faced
- Zero VOC
- UL Classified

COLOR: Aluminum
METHOD: Tape

BUTYL GASKET TAPE

14-40

HVAC FLANGE SEALANT TAPE

- Extruded, pre-formed, double sided butyl sealant tape for bolted flange joints
- UL Classified

COLOR: Gray
METHOD: Tape



fosterproducts.com

hbf-cp.customerservice@hbfuller.com
+1 833-849-3700 | hbfuller.com

3003-R0126