



HVAC SELECTION GUIDE





our **history**

For more than 100 years, engineers, owners and contractors have depended on the quality and reliability of Foster® products. Since 1909, Foster® has earned a well-deserved reputation as a developer and supplier of high-quality adhesives, sealants, and coatings for the industrial and commercial construction industries.

Foster® has a comprehensive accessory product line to serve the needs of the HVAC industry. From duct sealants to adhesives to closure mastics, we make the products that contractors and owners depend on to ensure a long-lasting, high-quality installation.

Contact your Foster® Sales Representative

fosterproducts.com



HVAC PRODUCT APPLICATIONS

1 DUCT SEALANTS

SMOOTH:


32-18 Air-Fas™
32-19 Duct-Fas™

FIBRATED:

32-13 Low VOC
32-14 High Velocity
32-16 Fiber-Fas™
32-17 Safetee™
FDS-181 Air-Tight™

2 CLOSURE MASTIC

FDS-181 Air-Tight™

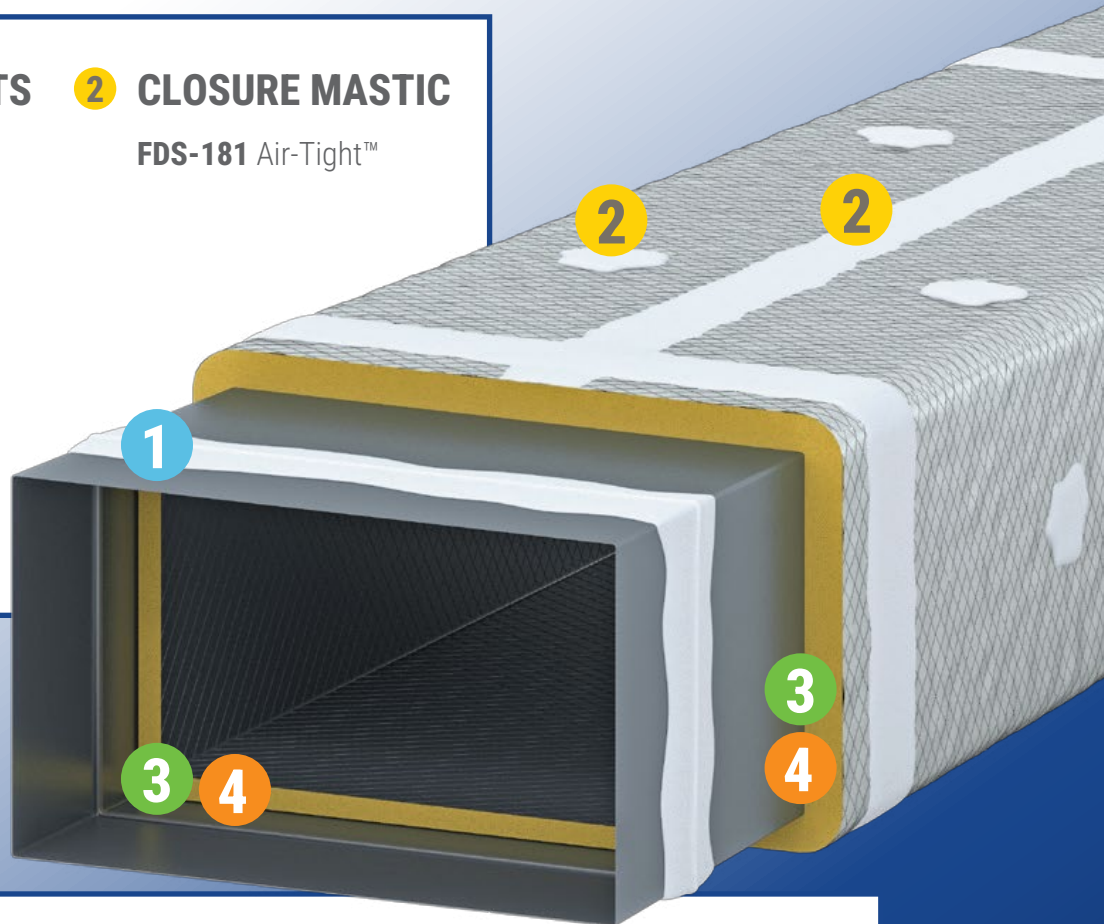

Duct Liner & Duct Wrap Adhesives

3 WATER-BASED

85-10 Duct Liner Adhesive
85-60 Quick-Tack™
85-62 Jac-Tac™
85-65 Stic-Fas™

4 SOLVENT-BASED

81-10 S.M. Adhesive
85-22 Duct-Fas™
85-40 Fos-Stik™ Canister
85-45 Fos-Stik™ Aerosol
85-25LV Drion™ Low VOC Contact Cement
85-26 Drion™ Contact Cement

Adhesives



WATER-BASED
85-10

DUCT LINER ADHESIVE

- Water-based adhesive for duct liner to metal
- Economical Coil Line Adhesive
- Meets ASTM C916 Type II

COLOR: White & Black
METHOD: Coil Line, Spray Head, Drip Line, Roll Coater



WATER-BASED
85-60

QUICK-TACK™ ADHESIVE

- Water-based adhesive for duct liner to metal
- Meets ASTM C916 Type II
- Aggressive Wet Tack
- Best for non-coil line uses by brush or spray
- UL Classified

COLOR: Tan
METHOD: Spray, Brush, Roller



WATER-BASED
85-62

JAC-TAC™ ADHESIVE

- Water-based adhesive for duct liner to metal
- Meets ASTM C916 Type II

COLOR: Black
METHOD: Coil Line, Spray, Brush, Roller



WATER-BASED
85-65

STIC-FAS™ ADHESIVE

- Water-based adhesive for duct liner to metal
- Meets ASTM C916 Type II

COLOR: Gray
METHOD: Coil Line, Spray, Brush, Roller



SOLVENT-BASED
81-10

S.M. ADHESIVE

- Solvent-based adhesive for duct liner to metal
- Meets ASTM C916 Type IV and UL Classified

COLOR: Green
METHOD: Spray, Brush, Roller



SOLVENT-BASED
82-55

INSULATION HANGER / STICK PIN ADHESIVE

- Solvent-based adhesive for insulation stick pins to various substrates

COLOR: White
METHOD: Trowel, Putty Knife



SOLVENT-BASED
85-40

FOS-STIK™
CANISTER ADHESIVE

- Solvent-based general use adhesive
- Contact adhesive for flexible and elastomeric foam insulation

COLOR: Clear
METHOD: Canister adhesive
- web spray



SOLVENT-BASED
85-45

FOS-STIK™
AEROSOL ADHESIVE

- Solvent-based general use adhesive
- Meets VOC requirements for web spray aerosol adhesive (not for California - CARB)

COLOR: Dries Clear
METHOD: Aerosol adhesive
- web spray



SOLVENT-BASED
85-25LV

DRION™ LOW VOC
CONTACT CEMENT

- Solvent-based contact adhesive for flexible and elastomeric foam insulation

COLOR: Amber
METHOD: Brush, Roller, Spray



SOLVENT-BASED
85-26

DRION™ CONTACT CEMENT

- Solvent-based contact adhesive for flexible and elastomeric foam insulation
- Used for forming and bonding joints of pre-insulated phenolic and PIR HVAC ducts

COLOR: Yellow
METHOD: Brush, Roller



HOT MELT
83-13
HMZP

HOT MELT ADHESIVE

- PSA adhesive for shop fabrication of insulation to metal
- Facing and jacketing adhesive for pipe covering insulation fabrication
- 100% solids

COLOR: Translucent Amber
METHOD: Swirl Spray, Extrusion

Duct Sealants



SOLVENT-BASED
10-42

PUMPABLE COLD SEALER

- Use for sheet metal locking joints
- Non-skinning, permanently flexible seal on contact

COLOR: White
METHOD: Fabrication Joint Sealer



**WATER-BASED
FIBRATED**
FDS-181



AIR-TIGHT™ DUCT SEALANT

- Water-based fibrated duct sealant and closure mastic
- Indoor / Outdoor Use
- UL 181A-M and UL 181B-M Listed

COLOR: White, Gray, Black
METHOD: Brush



**SOLVENT-BASED
FIBRATED**
32-13

LOW VOC HIGH VELOCITY DUCT SEALANT

- Solvent-based fibrated duct sealant for indoor or outdoor use
- Low VOC

COLOR: Gray
METHOD: Brush, Cartridge



**SOLVENT-BASED
FIBRATED**
32-14



HIGH VELOCITY DUCT SEALANT

- Solvent-based fibrated duct sealant for indoor use
- UL Classified to UL 723

COLOR: Gray
METHOD: Brush



**WATER-BASED
FIBRATED**
32-16



FIBER-FAS™ DUCT SEALANT

- Water-based fibrated duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray
METHOD: Brush



**WATER-BASED
FIBRATED**
32-17



SAFETEE™ DUCT SEALANT

- Water-based fibrated duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray
METHOD: Brush, Cartridge



WATER-BASED
SMOOTH

32-18



AIR-FAS™ DUCT SEALANT

- Water-based smooth duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray
METHOD: Brush



WATER-BASED
SMOOTH

32-19



DUCT-FAS™ DUCT SEALANT

- Water-based smooth duct sealant for indoor or outdoor use
- UL 181B-M Listed
- UL Classified to UL 723

COLOR: Gray
METHOD: Brush, Cartridge



SILICONE

95-22

SIL-SEAL™ SILICONE SEALANT

- Neutral cure, RTV 100% silicone sealant for indoor and outdoor use
- Low VOC

COLOR: Translucent
METHOD: Cartridge

Tapes



ROLLED MASTIC
SEALANT TAPE

10-17



AIR-TIGHT™ FOIL MASTIC SEALANT TAPE

- Butyl-based, pressure sensitive mastic duct sealant tape for indoor or outdoor use
- Aluminum Foil Faced
- Zero VOC
- UL Classified

COLOR: Aluminum
METHOD: Tape



BUTYL
GASKET TAPE

14-40



HVAC FLANGE SEALANT TAPE

- Extruded, pre-formed, double sided butyl sealant tape for bolted flange joints
- UL Classified

COLOR: Gray
METHOD: Tape



fosterproducts.com

hbf-cp.customerservice@hbfuller.com

+1 833-849-3700 | hbfuller.com

3003-R0126