




Foster  TM

SELECTION GUIDE

For Commercial
& Industrial Projects

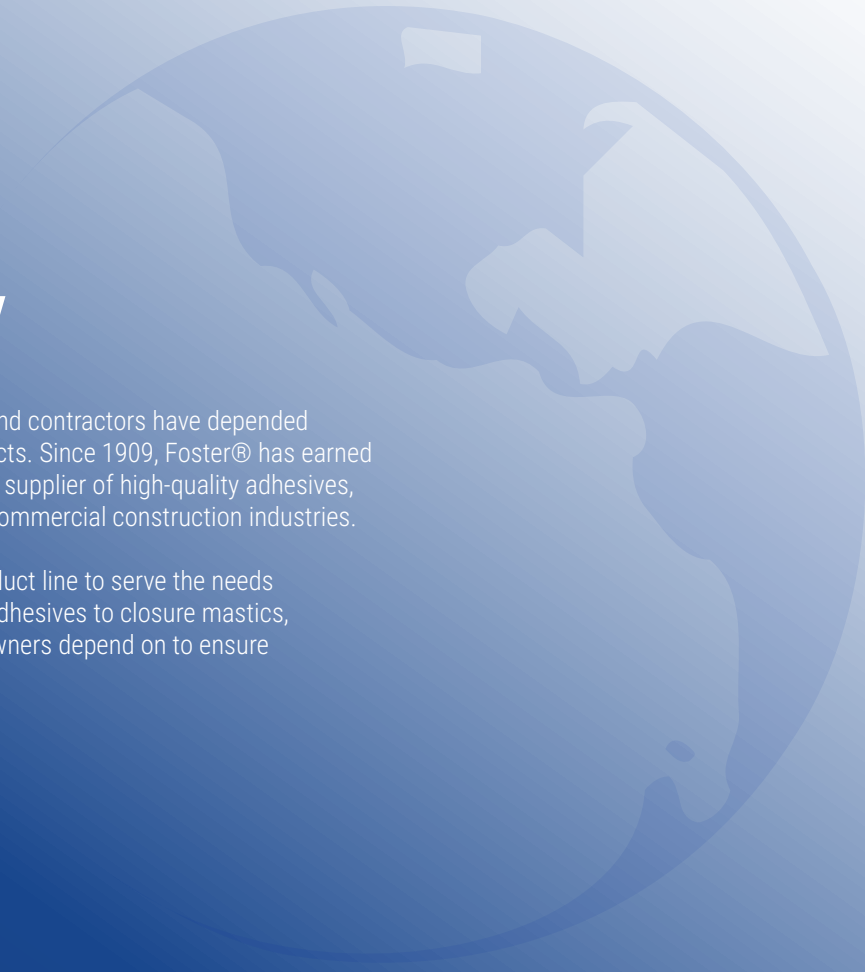

our **history**

For more than 100 years, engineers, owners and contractors have depended on the quality and reliability of Foster® products. Since 1909, Foster® has earned a well-deserved reputation as a developer and supplier of high-quality adhesives, sealants, and coatings for the industrial and commercial construction industries.

Foster® has a comprehensive accessory product line to serve the needs of the HVAC industry. From duct sealants to adhesives to closure mastics, we make the products that contractors and owners depend on to ensure a long-lasting, high-quality installation.

Contact your Foster® Sales Representative

fosterproducts.com

TABLE OF CONTENTS

COMMERCIAL PRODUCTS

Selection Matrix5

Mastics & Coatings6

Jackets / Membranes8

Adhesives9

Sealants.....11

INDUSTRIAL PRODUCTS

Selection Matrix13

Mastics & Coatings14


Jackets / Membranes16

Adhesives17



Sealants.....19

Vapor Stop Sealants.....21

Contact & More Information23

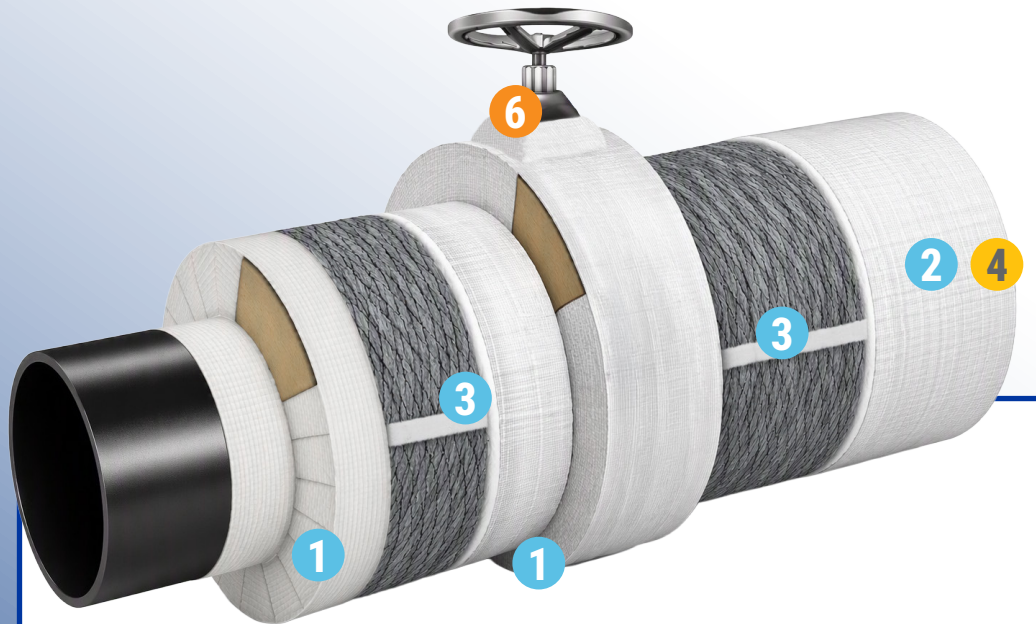

- 1 Vapor Seal with Mesh Reinforcement
- 2 Lagging Coating with Cloth/Mesh Reinforcement
- 3 Vapor Seal of Jacketing, Seams, Laps, Punctures and Taped Joints
- 4 Vapor Barrier Jacket
- 5 Insulation Adhesive
- 6 Flashing Vapor Seal

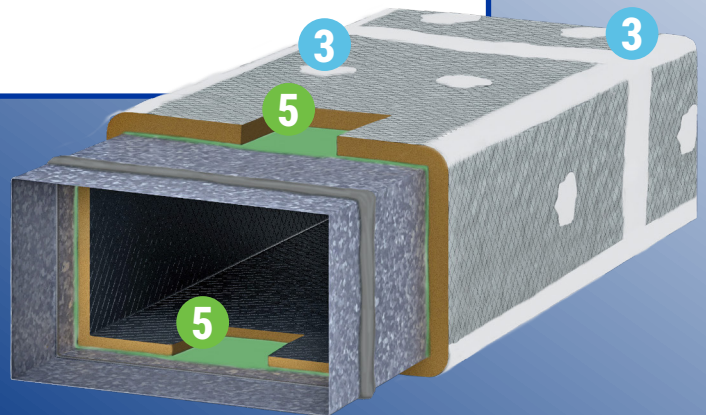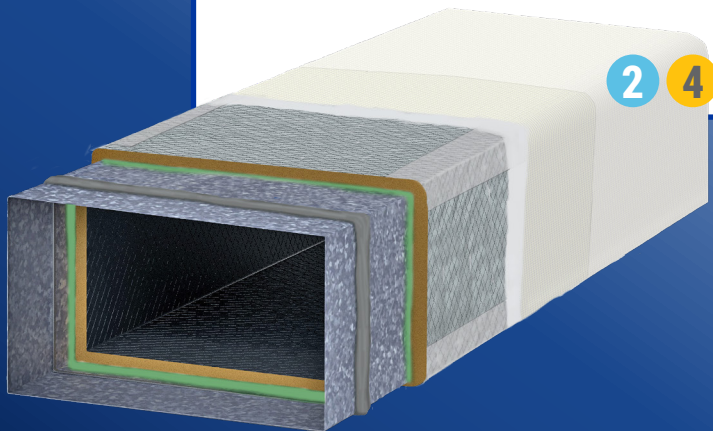



APPLICATION

INSULATION TYPE

MASTICS & COATINGS

1 2 3	VAPOR SEALING, INSULATION FACING, & JACKETING (FSK, ASJ, FRK)	LAGGING ADHESIVE COATING	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	POLYSTYRENE	RUBBER FOAM / OTHER
30-36HF		● ^a	●	○	○*	●
30-36HF-AF		● ^a	●	○	○*	●
81-42W		● ^a	●	○	○*	○
46-50	○	● ^b	●	●	●*	●
30-65	●	○ ^b	●	○	○*	○
30-80	●	○ ^b	●	●	●*	○
30-80AF	●	○ ^b	●	●	●*	○
30-33	●	○ ^b	●	○	○*	○

JACKETS & MEMBRANES

4	VAPOR & WEATHER BARRIER	REINFORCING FABRIC	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	POLYSTYRENE	RUBBER FOAM / OTHER
NeoClad™	●		○	●	●	
NeoClad™ PRO	●		○	●	●	
Chil-Glas® #10		●	●	●	●	●

ADHESIVES

5	ATTACHMENT LAP	FABRICATION FACING	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	POLYSTYRENE	RUBBER FOAM / OTHER
85-15	●	●	●	●		
85-22	○	○	●	●		
85-40	●	○	●	●	●	●
85-45N	○	○	●	●		●
85-50	○	○	●	●	●	●
85-53		●	●			
85-55HF		●	●	●		
85-70	●		●			
83-13HM	○	●	●	●	●	●

SEALANTS

6	JOINT	FLASHING	METAL JACKETING	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	POLYSTYRENE	RUBBER FOAM / OTHER
30-45N	●	○	○		○	●	
95-44	○	●	●		●		

This guide is provided as a quick reference. Please see product details in this catalogue, and product data sheet for specific test methods, installation methods and additional information.

* Always choose white colored coating for exterior use on polystyrene insulation. Do not use solvent based products with polystyrene.

^a With Lagging Cloth

^b With Mesh Reinforcement

COMMERCIAL

Mastics & Coatings



WATER BASED
HALOGEN FREE

30-36HF



SEALFAS®

- LEED v4 Compliant
- MIL-DTL-3316D, Class 1, Grade A
- QPD-3316 Listed
- USCG 164.112/172/0
- Halogen Free Lagging Adhesive/Coating

APPLICATION: Lagging
INSULATIONS: Fiberglass, MW, PIR, Cellular Glass
COLOR: White
METHOD: Brush, Spray



WATER BASED
HALOGEN FREE-ANTIFUNGAL

30-36HF-AF



SEALFAS®

- LEED v4 Compliant
- MIL-DTL-3316D, Class 1, Grade A
- QPD-3316 Listed
- Halogen Free Lagging Adhesive/Coating
- Fungus Resistant

APPLICATION: Lagging
INSULATIONS: Fiberglass, MW, PIR, Cellular Glass
COLOR: White
METHOD: Brush, Spray



WATER BASED

81-42W



LAGFAS®

- LEED v4 Compliant
- Lagging Adhesive/Coating

APPLICATION: Lagging
INSULATIONS: Fiberglass, MW
COLOR: White
METHOD: Brush, Airless Spray, Dip



WATER BASED

46-50



WEATHERITE™

- LEED v4 Compliant
- Weather Barrier Mastic

APPLICATION: Full Coverage
Protectant
INSULATIONS: Fiberglass, MW, Polystyrene,
Rubber Foam, PIR, Cellular Glass
COLOR: White
METHOD: Trowel, Brush, Airless Spray



WATER BASED

30-65



VAPOR-FAS™ WB Coating

- LEED v4 Compliant
- ASTM C755-19*
- Vapor Retarder Closure Mastic

APPLICATION: Vapor Sealing
INSULATIONS: Fiberglass, MW, Polystyrene, Rubber Foam
COLOR: White
METHOD: Brush, Airless Spray



WATER BASED

30-80



VAPOR-SAFE®

- LEED v4 Compliant
- ASTM C755-19
- MIL-PRF-19565D, Type II
- QPD-19565 Listed
- Vapor Retarder Closure Mastic

APPLICATION: Vapor Sealing, Full Coverage Protectant
INSULATIONS: Fiberglass, MW, Polystyrene, Rubber Foam
COLOR: White
METHOD: Brush, Airless Spray



WATER BASED
ANTIFUNGAL

30-80AF



VAPOR-SAFE®

- LEED v4 Compliant
- ASTM C755-19
- MIL-PRF-19565D, Type II
- Fungus Resistant Vapor Retarder Closure Mastic

APPLICATION: Vapor Sealing, Full Coverage Protectant
INSULATIONS: Fiberglass, MW, Polystyrene, Rubber Foam
COLOR: White
METHOD: Brush, Airless Spray



WATER BASED

30-33



VAPOR-OUT™

- LEED v4 Compliant
- ASTM C755-19*
- Vapor Retarder Closure Mastic

APPLICATION: Vapor Sealing
INSULATIONS: Fiberglass, MW, Polystyrene, Rubber Foam
COLOR: White
METHOD: Brush

* Meets the permeance requirements of ASTM C755-19, Section 7.2.2 for below ambient vapor retarder coatings when used as a closure mastic in conjunction with ASJ and other vapor retarder membranes.

Jackets & Membranes



ALUMINUM/POLYMER
LAMINATE

62-15

NeoClad™ Vapor Barrier Jacketing

- ASTM C1775
- PSA Acrylic Adhesive
- 5 Ply Membrane
- Zero Permeance
- Use Indoors & Outdoors

APPLICATION: Zero Perm Vapor & Weather Barrier
INSULATIONS: Polystyrene, Cellular Glass, PIR/PUR, Faced Rigid FG
COLOR: Silver & White (smooth / embossed)
DIMENSIONS: 36" x 150' rolls
4" x 150' rolls
4" x 45' rolls




ALUMINUM/POLYMER
LAMINATE

62-20

NeoClad™ PRO Vapor Barrier Jacketing

- Self-Healing Butyl Adhesive
- 5 Ply Membrane
- Zero Permeance
- Use Indoors & Outdoors

APPLICATION: Zero Perm Vapor & Weather Barrier
INSULATIONS: Polystyrene, Cellular Glass, PIR/PUR, Faced Rigid FG
COLOR: Silver & White (smooth / embossed)
DIMENSIONS: 36" x 50' rolls



OPEN WEAVE
GLASS FIBER

CHIL-GLAS® #10 Reinforcing Membrane

- High Strength, Open Weave
- 1.9 oz / square yard
- 10 x 10 strands/in²
- Provides reinforcement and thickness control to coatings

APPLICATION: Reinforcing Fabric
COLOR: White
DIMENSIONS: 39" x 150' rolls



SOLVENT BASED

85-15



STIC-SAFE®

- Flammable (FP: -22°C)
- ASTM C916, Type IV
- Adheres fibrous insulation to metal

APPLICATION: Attachment, Lap Sealing, Fabrication
INSULATIONS: Fiberglass, MW, PIR, Aerogel
COLOR: Amber
METHOD: Brush



SOLVENT BASED

85-22



DUCT-FAS®

- Flammable (FP: -7°C)
- ASTM C916, Type IV
- Fast setting
- Smooth spray for excellent coverage

APPLICATION: Attachment, Lap Sealing, Fabrication, Facing
INSULATIONS: Fiberglass, MW, PIR, Aerogel, Cellular Glass
COLOR: Red
METHOD: Brush, Spray



SOLVENT BASED

85-45N 85-40

FOS-STIK™

- Flammable (FP: -40°C)
- Web Spray
- Fast Tacking
- Not for sale in California

APPLICATION: Attachment, Lap Sealing, Fabricating, Facing
INSULATIONS: Fiberglass, MW, Rubber Foam, Aerogel, PIR, Cellular Glass (facing), Polystyrene (85-40)
COLOR: Clear (dry)
METHOD: Aerosol Spray



WATER BASED

85-50

Pressure Sensitive Adhesive

- ASTM C916, Type II
- Dries to a tacky film
- Compatible with polystyrene insulation

APPLICATION: Attachment, Lap Sealing, Facing on Pipe Covering
INSULATIONS: Fiberglass, MW, Polystyrene, Rubber Foam, PIR, Cellular Glass (facing)
COLOR: Clear (dry)
METHOD: Brush, Spray

COMMERCIAL

Adhesives



WATER BASED

85-53



Facing and Laminating Adhesive

- For bonding facing to Metal Building Insulation

APPLICATION: Facing
INSULATIONS: Fiberglass Blanket
COLOR: Clear (dry)
METHOD: Spray, Roll Coat



WATER BASED

85-55HF

Fire Resistive Facing Adhesive

- For bonding MIL-C-20079 facings
- For fabrication of MIL-DTL-32585 hull board
- Use as a fabrication adhesive for bonding various facings to insulation

APPLICATION: Facing
INSULATIONS: Fiberglass, MW, Phenolic
COLOR: Clear (dry)
METHOD: Spray, Roll Coat



WATER BASED

85-70



SPARK-FAS® WB ADHESIVE

- ASTM C916, Type I
- MIL-DTL-3316D, Class 2, Grade A
- QPD-3316 Listed
- LEED v4 Compliant

APPLICATION: Attachment
INSULATIONS: Fiberglass, MW
COLOR: Off-White
METHOD: Brush



HOT MELT

83-13HM

Facing Adhesive

- Pressure sensitive
- Immediate tack and bond
- No solvent or solvent vapors
- No VOCs

APPLICATION: Attachment, Facing
INSULATIONS: Fiberglass, MW, Polystyrene, Rubber Foam, Aerogel, PIR, Cellular Glass
COLOR: Amber
METHOD: Swirl Spray, Extrusion



OIL BASED

30-45N



FOAMSEAL™

- High solids: ~95%
- Low vapor permeance in sealed joints
- Compatible with polystyrene insulation
- Vapor seal between pipe and insulation to -73°C

APPLICATION: Joint, Flashing, Metal Jacketing
INSULATIONS: Cellular Glass, PIR/PUR/Phenolic, Polystyrene, Aerogel
COLOR: Gray
METHOD: Brush




SOLVENT BASED

95-44

ELASTOLAR®

- Butyl Rubber Based
- Low vapor permeance
- Apply in laps of jacketing and as a flashing to seal against water and water vapor intrusion
- -55°C to 121°C

APPLICATION: Joint, Flashing, Metal Jacketing
INSULATIONS: Fiberglass, MW, PIR, Cellular Glass
COLOR: Aluminum
METHOD: Cartridge, Gun, Trowel

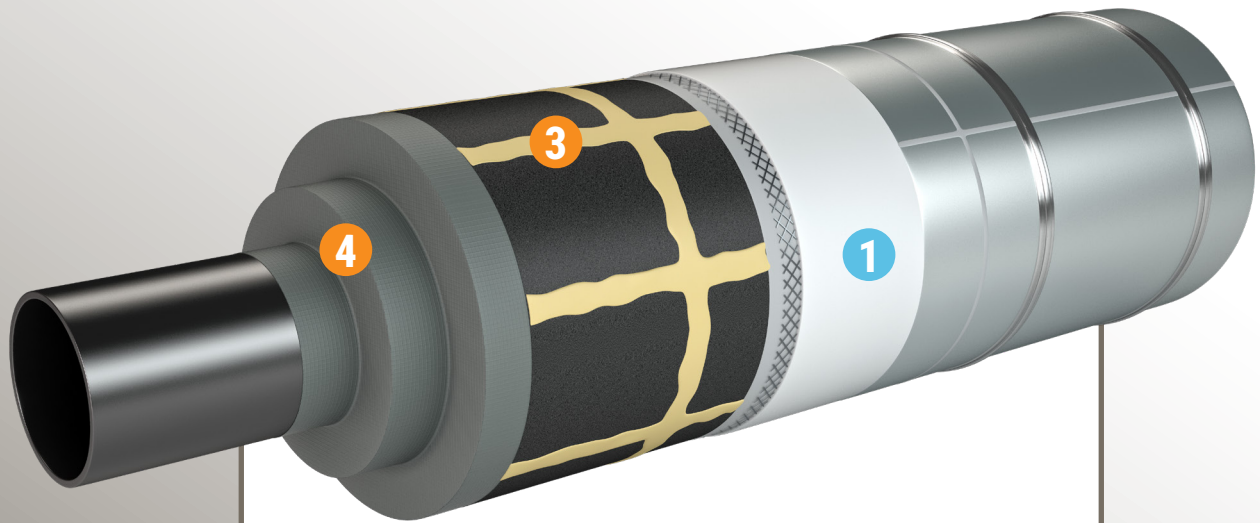

- 1 Primary Vapor Retarder
- 2 Primary Vapor Retarder Membrane
- 3 Joint Sealant
- 4 Vapor Stop Sealant
- 5 Jacketing Sealants



This guide is provided as a quick reference. Please see product details in this catalogue, and product data sheet for specific test methods, installation methods and additional information.

*Always choose white colored coating for exterior use on polystyrene insulation.
Do not use solvent based products with polystyrene.



APPLICATION

INSULATION TYPE

MASTICS & COATINGS

1	PRIMARY VAPOR RETARDER	WEATHER BARRIER / BREATHER	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	CALCIUM SILICATE	POLYSTYRENE	AEROGEL	RUBBER FOAM / OTHER
30-80	●		●	●		●*		○
35-00N		●	●	●	●	●*	●	○
60-25, 60-26	○		○	○				
60-38, 60-39	●		○	●			●	○
60-90, 60-91	●		●	●			●	○
60-95, 60-96	●		●	●			●	○
65-05	○		○	○				
90-07		○	○	○	○			

JACKETS & MEMBRANES

2	PRIMARY VAPOR BARRIER	REINFORCING FABRIC	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	CALCIUM SILICATE	POLYSTYRENE	AEROGEL	RUBBER FOAM / OTHER
Butylar™ NXT	●			●		●	●	●
Mast-A-Fab® (42-24)		●		●	●	●	●	●
Chil-Glas® #10		●		○	○	○	○	○

ADHESIVES

	ATTACHMENT LAP	FABRICATION FACING	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	CALCIUM SILICATE	POLYSTYRENE	AEROGEL	RUBBER FOAM / OTHER
81-27	●	●			●			Perlite
81-84NH	●	●		●		●		
82-77	●	○		●		●	●	●
85-15	●	●		●			●	
85-40	●	○	●	●		●	●	●
85-45N	○	○	●	○			●	●

SEALANTS

3 5	JOINT	FLASHING	METAL JACKETING	FIBERGLASS & MINERAL WOOL	RIGID INSULATION (CELLULAR GLASS, PIR, PHENOLIC)	CALCIUM SILICATE	POLYSTYRENE	AEROGEL	RUBBER FOAM / OTHER
30-16	Anti-Abrasion Bore Coating				●				
30-45N	○	○	○		○		●		
95-44	○	●	●		●			●	
95-50	●				●				
95-55	●				●				
96-04			●						
4	VAPOR STOP SEALANT								
90-61		●			○			○	●
90-66		●			○			○	●
91-30		●			●			●	

INDUSTRIAL

Mastics & Coatings



WATER BASED

30-80



VAPOR-SAFE™

- LEED v4 Compliant
- ASTM C755-19
- MIL-PRF-19565D, Type II
- QPD-19565 Listed
- Vapor Retarder Mastic

APPLICATION: Full Coverage Vapor Retarder Protectant

INSULATIONS: PIR, Cellular Glass, Fiberglass, MW, Aerogel, Rubber Foam

COLOR: White

METHOD: Brush, Airless Spray



WATER BASED

35-00N



SEALFAS G-P-M®

- LEED v4 Compliant
- Weather Barrier Mastic

APPLICATION: Full Coverage Protectant

INSULATIONS: PIR, Cellular Glass, Calcium Silicate, Aerogel, MW, FG

COLOR: White

METHOD: Trowel, Glove



ASPHALT BASED

60-25 60-26

C.I. MASTIC®

- Low permeance
- Compatible with buried applications
- Vapor Retarder Mastic
- ASTM C755-19

APPLICATION: Full Coverage Vapor Retarder Protectant

INSULATIONS: PIR, Cellular Glass, MW, FG

COLOR: Black

METHOD: Trowel, Industrial Airless Spray



SOLVENT BASED

60-38 60-39



MONOLAR® II

- Very low permeance
- CSPE (formerly Hypalon) based formulation
- Vapor Retarder Mastic
- Excellent chemical and weather resistance
- ASTM C755-19

APPLICATION: Full Coverage Vapor Retarder Protectant

INSULATIONS: PIR, Cellular Glass, Aerogel, MW, FG

COLOR: White, Gray

METHOD: Trowel, Glove



SOLVENT BASED

60-90
60-91



MONOLAR® MASTIC

- Very low permeance
- Contains CSPE (formerly Hypalon)
- Vapor Retarder Mastic
- Excellent chemical and weather resistance
- ASTM C755-19

APPLICATION: Full Coverage Vapor Retarder Protectant
INSULATIONS: PIR, Cellular Glass, Aerogel, MW, FG
COLOR: White, Gray
METHOD: Trowel, Glove



SOLVENT BASED

60-95
60-96



MONOLAR® COATING

- Very low permeance
- ASTM C755-19
- Contains CSPE (formerly Hypalon)
- Excellent chemical and weather resistance
- Vapor Retarder Mastic

APPLICATION: Full Coverage Vapor Retarder Protectant
INSULATIONS: PIR, Cellular Glass, Aerogel, MW, FG
COLOR: White, Gray
METHOD: Brush, Spray



ASPHALT BASED

65-05

C.I. MASTIC™ FIRE RESISTIVE

- Low permeance
- Fire Resistive formulation
- Vapor Retarder Mastic
- ASTM C755-19

APPLICATION: Full Coverage Vapor Retarder Protectant
INSULATIONS: PIR, Cellular Glass, MW, FG
COLOR: Black
METHOD: Trowel



ASPHALT EMULSION

90-07

H.I. MASTIC®

- Low VOC
- Economical Weather Barrier Mastic

APPLICATION: Full Coverage Protectant
INSULATIONS: PIR, Cellular Glass, MW, FG, Calcium Silicate
COLOR: Black
METHOD: Trowel

Jackets & Membranes




ALUMINUM FACING with BLACK BUTYL

BUTYLAR™ NXT Vapor Barrier Jacketing

- 12/25/25 PAP facing
- Very low permeance
- Protective barrier for cold/cryogenic applications

APPLICATION: Primary Vapor Barrier
INSULATIONS: PIR, Cellular Glass, Aerogel, Rubber Foam
THICKNESS: 1.2mm high-performance butyl adhesive
SIZES: 1m x 15m rolls
100mm x 15m rolls




LENO WEAVE SYNTHETIC FIBER

42-24

MAST-A-FAB® Reinforcing Membrane

- 1.3 oz / square yard
- 9 x 8 strands / in²
- Provides reinforcement and thickness control to coatings

APPLICATION: Reinforcing Fabric
COLOR: White
SIZES: 30" x 600' rolls



OPEN WEAVE GLASS FIBER

#10 CHIL-GLAS® Reinforcing Membrane

- 1.9 oz / square yard
- 10 x 10 strands / in²
- Provides reinforcement and thickness control to coatings
- High Strength, Open Weave

APPLICATION: Reinforcing Fabric
COLOR: White
SIZES: 39" x 150' rolls



WATER BASED

81-27

FIBROUS ADHESIVE

- Inorganic, sodium silicate
- Incombustible
- Uses up to 800°F (425°C)

APPLICATION: Attachment, Fabrication
INSULATIONS: Calcium Silicate, Perlite
COLOR: Beige
METHOD: Brush, Trowel



REACTIVE CURE - 2K

81-84NH

URETHANE ADHESIVE/SEALANT

- Two component urethane
- ~100% solids - non-shrinking
- Halide Free
- Cryogenic adhesive to: -165°C (PIR);
-105°C (Cellular Glass)

APPLICATION: Attachment, Fabrication
INSULATIONS: PIR/PUR/Phenolic, Cellular Glass,
Polystyrene, Aerogel, Rubber Foam
COLOR: Beige
METHOD: Notched Trowel



REACTIVE CURE - 3K

82-77

CRYOGENIC ADHESIVE

- 100% solids - non-shrinking
- Halide Free
- Cryogenic adhesive to:
-196°C (Cellular Glass or PIR)

APPLICATION: Attachment, Fabrication
INSULATIONS: PIR/PUR/Phenolic, Cellular Glass,
Aerogel
COLOR: Black
METHOD: Notched Trowel



SOLVENT BASED

85-15



STIC-SAFE®

- Flammable (FP: -22°C)
- ASTM C916, Type IV
- Adhering fibrous insulation to metal

APPLICATION: Attachment, Lap Sealing, Fabrication
INSULATIONS: Fiberglass, MW, PIR, Aerogel
COLOR: Amber
METHOD: Brush



SOLVENT BASED

85-45N
85-40

FOS-STIK™

- Flammable (FP: -40°C)
- Web Spray
- Fast Tacking
- Not for sale in California

APPLICATION: Attachment, Lap Sealing, Fabricating, Facing

INSULATIONS: Fiberglass, MW, Rubber Foam, Aerogel, PIR, Cellular Glass (facing), Polystyrene (85-40)

COLOR: Clear (dry)

METHOD: Aerosol Spray



WATER BASED

30-16

ANTI-ABRASION COATING/SEALER

- Protects from breakdown of insulation from expansion/contraction/vibrations
- Applied to bore of the insulation
- -196°C to 93°C

APPLICATION: Anti-Abrasion Bore Coating
INSULATIONS: Cellular Glass, PIR/PUR/Phenolic
COLOR: White
METHOD: Brush, Spray



OIL BASED

30-45N



FOAMSEAL™

- High solids: ~95%
- Low vapor permeance in sealed joints
- Compatible with polystyrene insulation
- Vapor seal between pipe and insulation to -73°C

APPLICATION: Joint, Flashing, Metal Jacketing
INSULATIONS: Polystyrene, Cellular Glass, PIR/PUR/Phenolic
COLOR: Gray



SOLVENT BASED

95-44

ELASTOLAR®

- Butyl Rubber Based
- Low vapor permeance
- Apply in laps of jacketing and as a flashing to seal against water and water vapor intrusion
- -55°C to 121°C

APPLICATION: Joint, Flashing, Metal Jacketing
INSULATIONS: Fiberglass, MW, PIR, Cellular Glass
COLOR: Aluminum
METHOD: Cartridge, Gun, Trowel



SOLVENT BASED

95-50

FLEXTRA®

- Butyl Rubber based
- Non-setting in joint
- Surface drying for compatibility with top coats
- Use to: -163°C (PIR); -107°C (Cellular Glass)

APPLICATION: Joint Sealant
INSULATIONS: Cellular Glass, PIR/PUR/Phenolic, Aerogel
COLOR: Beige
METHOD: Trowel

Sealants




SOLVENT BASED

95-55

INSULATION JOINT SEALANT

- Butyl polymer based
- High solids: ~95%
- Non-setting, non-skinning
- Permanently non-drying
- Use to: -163°C (PIR); -105°C (Cellular Glass)

APPLICATION: Joint, Metal Jacketing Lap Sealant
INSULATIONS: Cellular Glass, PIR/PUR/Phenolic
COLOR: Gray
METHOD: Trowel



EXTRUDED BUTYL

96-04

BUTYL FLASHING TAPE

- Apply in laps of jacketing and as a flashing to seal against water and water vapor intrusion
- 100% solids
- No cure or dry time

APPLICATION: Metal Jacketing, Lap Sealant
COLOR: Gray
SIZES: Various Sizes Available
METHOD: Tape



SOLVENT BASED

90-61

CRYOLAR™ 1K VAPOR STOP SEALANT

- One component, ready-to-use
- Cryogenic service to -196°C on pipes
- Very low permeance
- Improved application consistency

APPLICATION: Vapor Stop Sealant
INSULATIONS: Cellular Glass, PIR/PUR/Phenolic, Aerogel, Rubber Foam
COLOR: Gray
METHOD: Brush, Trowel



SOLVENT BASED-2K

90-66

CRYOGENIC ADHESIVE VAPOR STOP SEALANT

- Two component, vulcanizing rubber
- High solids
- Cryogenic service to -196°C on pipes
- Very low permeance

APPLICATION: Vapor Stop Sealant
INSULATIONS: Cellular Glass, PIR/PUR/Phenolic, Aerogel, Rubber Foam
COLOR: Black
METHOD: Brush



91-30

CRYOLAR® NXT Vapor Stop Tape

- 100% solids tape form
- Cryogenic service to -167°C on pipes
- Very low permeance
- No drying or cure time required

APPLICATION: Vapor Stop Sealant
INSULATIONS: Cellular Glass, PIR/PUR, Aerogel
COLOR: Black
METHOD: Tape



**GLOBALY SPECIFIED.
PROVEN.
PREFERRED.**



TECHNICAL SUPPORT & RESOURCES

Access technical expertise and responsive support to help specify, install, and maintain high-performing insulation systems.

- Product Selection Guidance
- Technical Data Sheets & Documentation
- Specification Support
- Application Assistance
- Project-Specific Recommendations
- Technical Troubleshooting



Customer Service & Technical Support

Monday - Friday: 7am - 6pm CST

Phone: 1-833-849-3700

hbf-cp.customerservice@hbfuller.com



Stay informed on product innovations, technical expertise, and industry insights.

Follow us on LinkedIn



fosterproducts.com

hbf-cp.customerservice@hbfuller.com

+1 833-849-3700 | hbfuller.com

3002-R0726